


Description

PA Jet Slot Diffuser (Model: JS) is designed for Supply Air application for AC System. It is suitable for ceiling mounted and long-range throw distance applications and standard constructed from extruded aluminium. Finishing for JS is standard powder coated in white colour, other colours are available upon request.

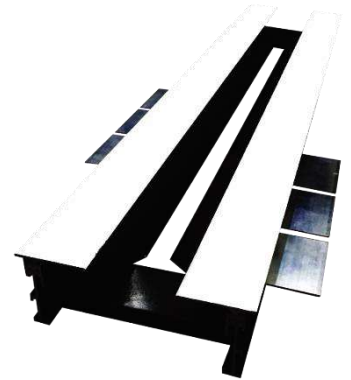

Installation Guideline

1. Accessories Connection

List of available accessories for JS:

- Plenum Box (PB) [Must pre-installed above the ceiling]

All accessories used for the JS must secure and tighten to the back of the JS with the use of a minimum of two M5 self-tapping screws on each side of the neck of the JS before the installation work can be carried out

2. Opening Clearance

The hole opening on the wall or ceiling shall be larger than the combination of the JS's neck with its respective accessories combination to permit the installation of the system and the gap should be within 5mm of the overall size of the JS's neck and its accessories combination.

3. Installation Detail

A. Countersunk Screw Mounting

After insert the JS into the opening hole, direct secure the JS with the use of an M5 countersunk screw on the frame of the JS tighten it until the surface of the JS is flush with the ceiling or wall.

